


## ASSEMBLY INSTRUCTIONS

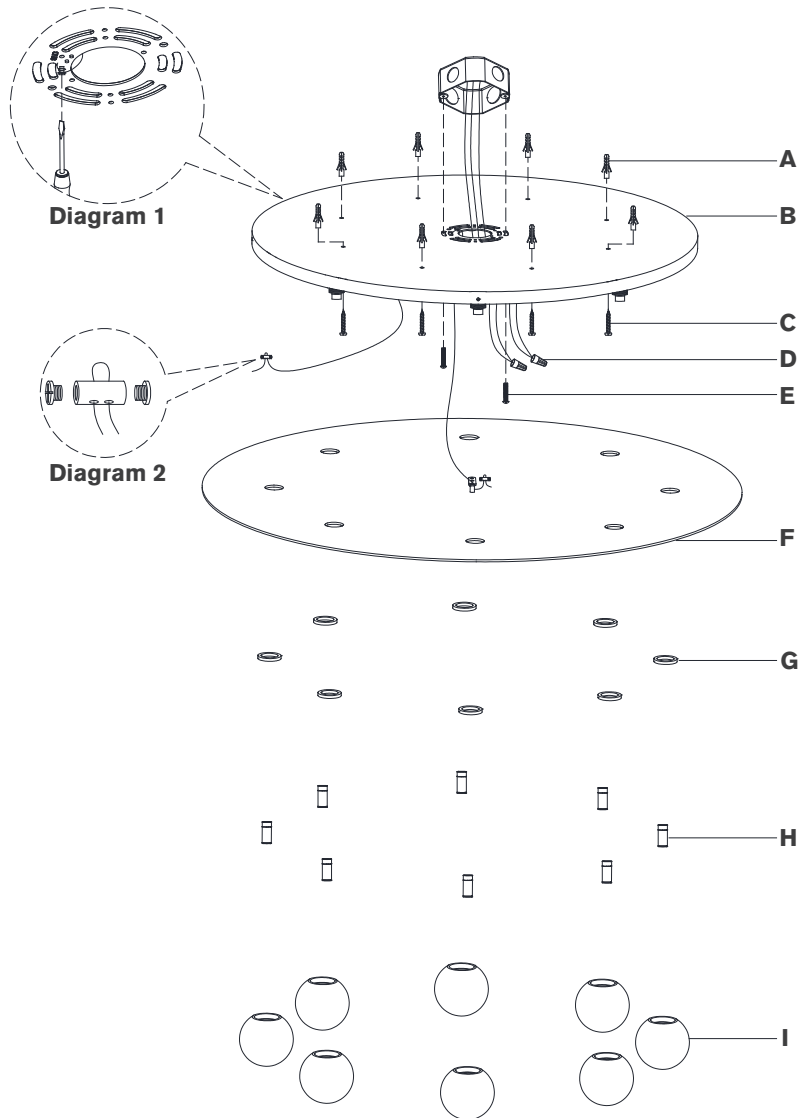

## Pertica 30" Eight Light Flush Mount

Item # KW 4521

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):

|                      |                     |       |
|----------------------|---------------------|-------|
| Phillips Screwdriver | Slotted Screwdriver | Drill |
| Pencil               | Hammer              |       |

### PERSONS REQUIRED: Two

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove metal plate (F) from mounting plate (B) by removing collar rings (G).
3. Using mounting plate (B) as a guide, line up with the junction box and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (A) into the holes using hammer.
5. Install mounting plate (B) to the junction box and secure with mounting screws (E), then secure wood screws (C) to anchors (A).
6. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.

**NOTE:** It is imperative that the fixture is grounded.


7. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut (D).
8. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut (D).

**CAUTION:** Do not reverse the hot and neutral connections.

9. Make sure all wire connections are tight, then carefully tuck into the junction box.

**NOTE:** It is recommended to have a helper assist in supporting the fixture for steps 10-11.

## ASSEMBLY INSTRUCTIONS

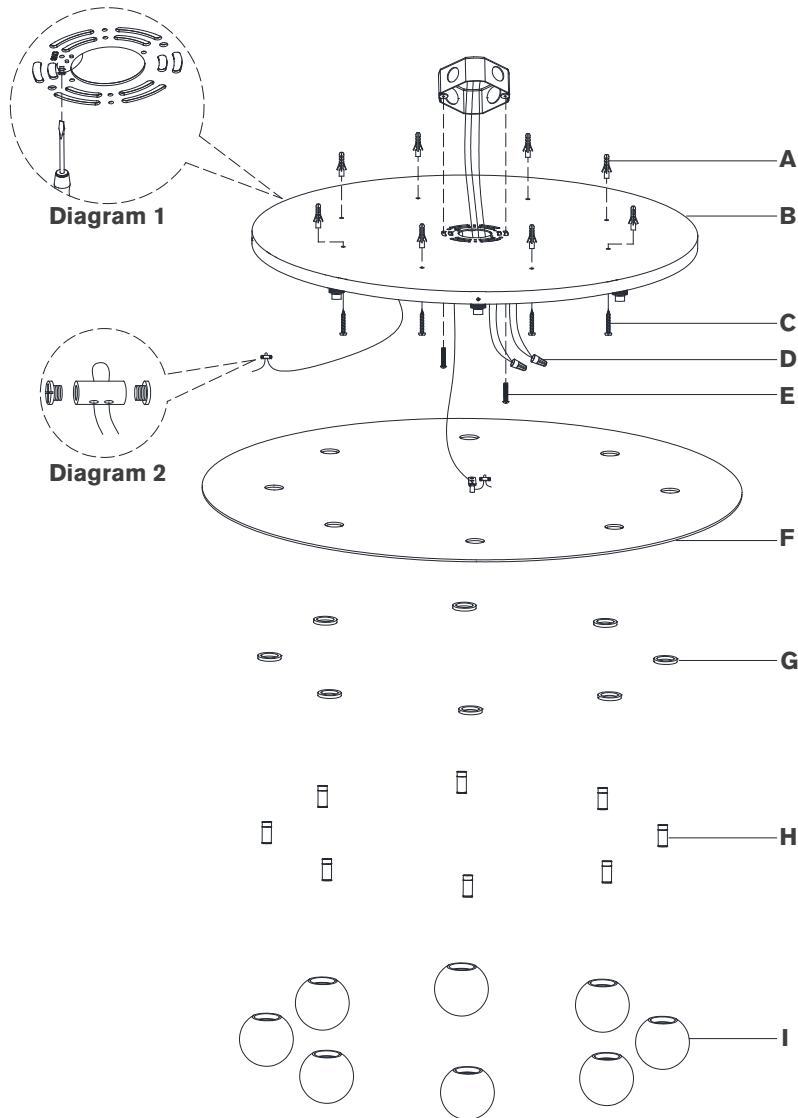

## Pertica 30" Eight Light Flush Mount

Item # KW 4521


### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Run support cable through hole on back of mounting plate (B).  
Loosen cable lock and install to end of support cable. Insert other end of cable through the cable lock and tighten ends with a screwdriver to secure. (see diagram 2)
11. Install metal plate (F) to mounting plate (B) and secure collar rings (G).
12. Remove protective caps (J) from mounting plate (B), then thread LED bulbs (H) to metal plate (F).  
**NOTE:** All LED Must be installed before testing or restoring power to avoid malfunction.
13. Thread shades (I) to metal plate (F).  
**NOTE:** Do not over-tighten otherwise shade could become damaged.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

## UNPACKING NOTICE

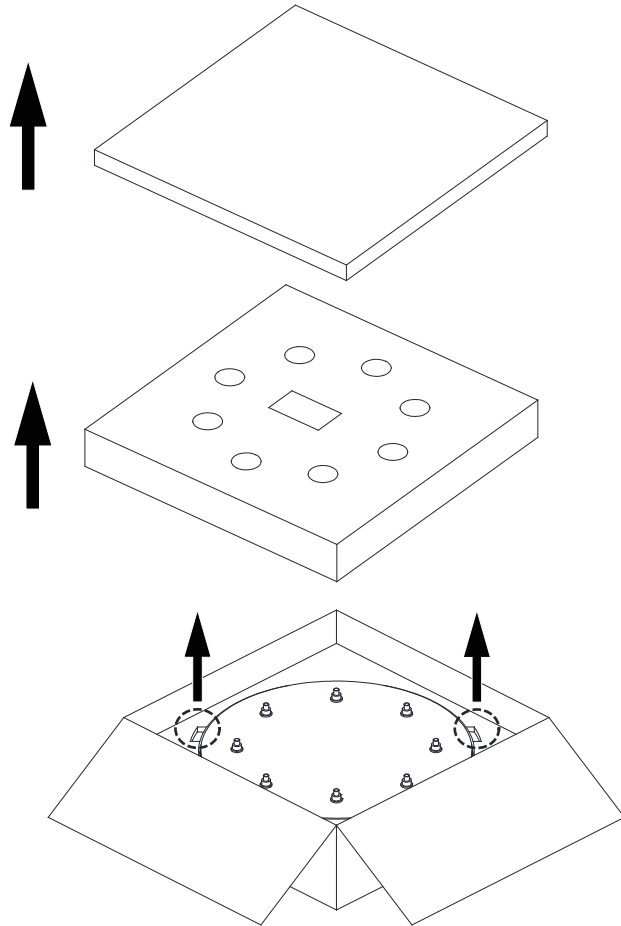

## Pertica 30" Eight Light Flush Mount

Item # KW 4521

### **NOTICE:**

Please follow instructions below to avoid possible damages caused by improper removal.

1. Open box and remove top layer of packaging.
2. Evenly lift shade in areas indicated by arrows (see diagram) until clear of packaging. Place on clean, soft surface.

**NOTE:** Remove slowly to avoid damages.