
Assembly Instructions: 1039-LP (Corbin)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

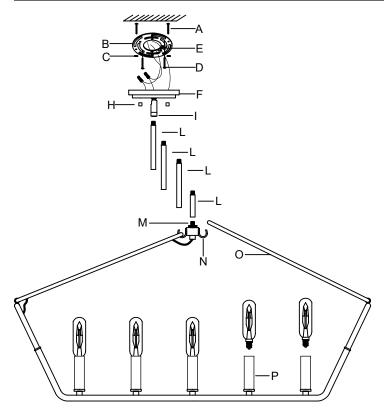

CONNECTING THE WIRES

3. Attach the fixture's wires to the house wires pulled from the junction box. Trim excess wires until 8 to 10 inches remain for connecting. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (B) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the wall, including the old mounting strap.

1. Take the mounting strap assembly from the parts bag. Mounting strap (B) contains several threaded holes. Two sets of mounting screws (A) should be attached to mounting strap (B). You may need to tighten nuts (C) that hold these screws in place. If the screws are not attached, please hold canopy (F) up to mounting strap (B). Line up the holes in canopy (F) with the holes in mounting strap (B) and insert mounting screws (A) into mounting strap (B) so that mounting screws (A) protrude through the holes in canopy (F). Mounting screws (A) are long, so please test the canopy against the mounting strap to see how far you should insert the screws. Remove the canopy (F) and tighten nuts (C) onto mounting screws (A) to hold the screws in place.

ASSEMBLING THE FIXTURE

2. Rods (L) are on the fixture's wires, but not connected to the fixture. Measure to determine the correct number of rods needed for proper hanging height. To lengthen the fixture, add additional rods. If additional rods are needed, contact the place of purchase to order. To shorten the fixture, Slide any excess rods off the fixture's wires to discard. Thread the wires through the rods and pull the wires until taut before threading the rods together. Thread bottom rod (L) onto post (M) at the top of the fixture's body near nipple (N). Twist the top rod (L) onto the threads of the swivel post (I) located on the canopy (F). Lock the rods in place by twisting screw (I). Pull the fixture's wires through the top of canopy (F).

| How to Identify the Fixture's Wires | | | 1 | House Wires |
|-------------------------------------|-----------------------|---|---------------|-------------|
| Hot | Neutral | Ground | Fixture Wires | ——— Hot |
| Smooth | Ribbed | Bare Metal, Green, or Green Inner Thread | Hot Hot | Neutral |
| Black | White | | Neutral | Ground |
| Black Inner Thread | White Inner Thread | | Ground — | |

FINISHING THE INSTALLATION

- 4. Hang the side poles (O) onto the hooks (N) located at the top of the fixture body.
- 5. Push canopy (F) up to the ceiling until mounting screws (A) protrude form the holes in the canopy (F). Tightly thread deco nuts (H) onto the exposed threads of mounting screws (A) until the canopy is snug against the ceiling and secure.
- 6. Attach socket covers (L) over the exposed sockets.

Install light bulbs (not provided) based on the fixture's specifications. Do not exceed the maximum wattage.

Your installation is complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

